

QUALITY. OVERVIEW. CONTROL.

And then it just flows.

*Safe &
easy*
wireless
control






FLEX MONITORING

Filter Communicator: The Schankschmiede remote detector transmits measurement data via WLAN or GSM directly to you – no matter where you are.

Four inputs for flowmeters record the throughput and determine the tapping behaviour. These data are then transmitted either by E-mail as daily reports, or via customised TCP protocols like MQTT and HTTP sent to your server. However, it can also use TCP protocols data according to your needs.

In addition, there are two digital inputs for connecting pressostats or blank detectors for gas pressure or level monitoring available. In the event of a deviation, they can submit a report and additionally trigger an order with the CO₂. Furthermore, the telecommunicator offers the possibility to connect of an RFID module with the filter detected, identified and unambiguous can be assigned.

hourly evaluation per filter

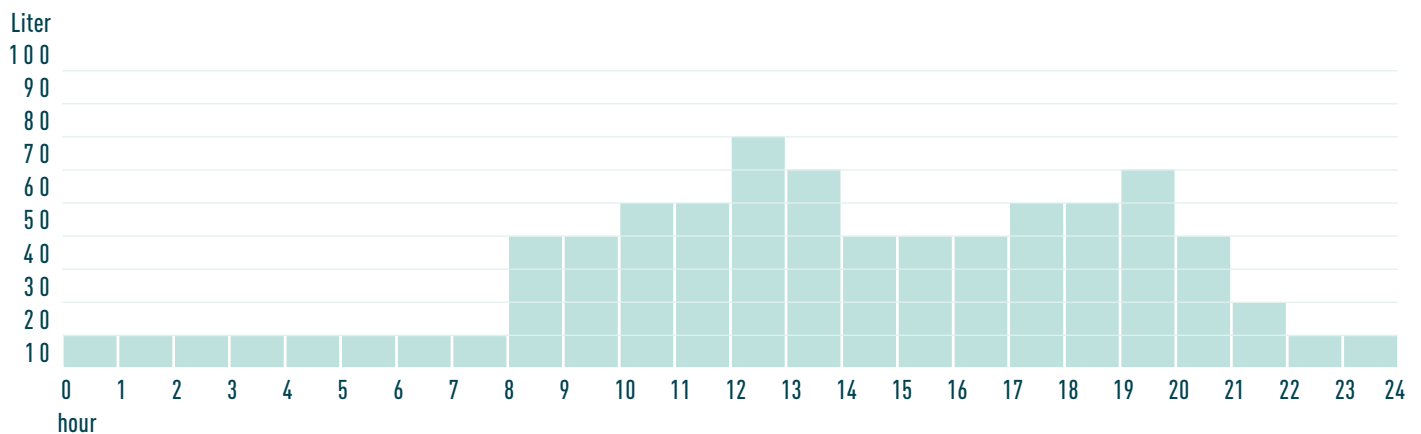

Schankschmiede
Mit uns läuft's einfach.



schankschmiede.at